

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum  
Internationales Büro



21 OCT 2004



(43) Internationales Veröffentlichungsdatum  
30. Oktober 2003 (30.10.2003)

(10) Internationale Veröffentlichungsnummer  
WO 03/089844 A1


PCT

- (51) Internationale Patentklassifikation<sup>7</sup>: F24D 19/10, G01F 1/26
- (72) Erfinder; und  
(75) Erfinder/Anmelder (nur für US): FAMOS, Toni [CH/CH]; Lehnisweidstrasse 43, CH-8967 Widen (CH).
- (21) Internationales Aktenzeichen: PCT/IB02/01382
- (74) Anwalt: E. BLUM & CO.; Vorderberg 11, CH-8044 Zürich (CH).
- (22) Internationales Anmeldedatum: 22. April 2002 (22.04.2002)
- (81) Bestimmungsstaaten (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (25) Einreichungssprache: Deutsch
- (26) Veröffentlichungssprache: Deutsch
- (71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von US): OSTACO AG [CH/CH]; Steinackerstrasse 6, CH-8902 Urdorf (CH).

[Fortsetzung auf der nächsten Seite]

(54) Title: DISTRIBUTION VALVE COMPRISING A FLOWMETER FOR INSTALLING IN AN INLET

(54) Bezeichnung: VERTEILERVERNITL MIT DURCHFLUSSMESSER FÜR DEN EINBAU IM ZULAUF

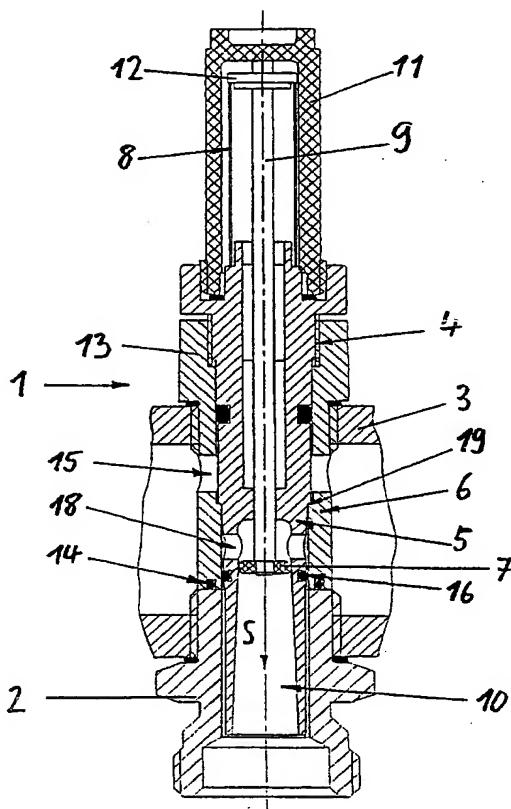

(57) Abstract: The invention relates to a distribution valve comprising a flowmeter for use in the flow pipe of a hot water heating circuit. Said distribution valve consists of a branch line (2) and an adjusting and measuring unit (1) for adjusting and displaying the flow rate through the branch line (2), said elements being screwed into opposing threaded holes of a flow pipe distribution line (3), which acts as a housing and supply line. The valve gap that determines the flow rate through the branch line (2) is formed between a valve closing body (5) and a valve seat body (6), the latter (6) being configured from a fixed housing section (13) of the adjusting and measuring unit (1), the front face of said section making contact in a sealing manner with a fixed component of the branch line (2). The flow is measured with the aid of an inflow member (7) that can be displaced by means of fluidic forces against a spring force in a flow canal (10), whereby the flow is diverted in the form of an S between the exit of the valve gap and the impact on the inflow member (7). Distribution valves of this type can also be used as shut-off valves as a result of their leak-free closing function between the supply line and the branch line and also provide a practically fluctuation-free flow rate display.

(57) Zusammenfassung: Erfindung betrifft ein Verteilervernilt mit Durchflusssmesser für die Verwendung im Vorlauf eines Warmwasser-Heizkreislauks. Das Verteilervernilt besteht aus einer Zweigleitung (2) und einer Einstell- und Messeinheit (1) zur Einstellung und Anzeige der Durchflussmenge durch die Zweigleitung (2), welche in sich gegenüberliegende Gewindelöcher eines Vorlauf-Verteilerbalkens (3), der als Gehäuse und Zuleitung dient, eingeschraubt sind. Der die Durchflussmenge durch die Zweigleitung (2) bestimmende Ventilsplatt wird zwischen einem Ventilschliesskörper (5) und einem Ventilsitzkörper (6) gebildet, wobei der Ventilsitzkörper (6) von einem feststehenden Gehäuseteil

(13) der Einstell- und Messeinheit (1) gebildet wird, welches stirnseitig mit einem

[Fortsetzung auf der nächsten Seite]

WO 03/089844 A1

[TRANSLATION OF APPLICATION AS ORIGINALLY FILED AND AS  
PUBLISHED AS WO 03/089844 A1]

5

06025PC

**DISTRIBUTION VALVE WITH FLOW METER FOR INSTALLING IN AN INLET**

TECHNICAL FIELD

10

The invention relates to distribution valves with flow meter, a distribution arrangement with such distribution valves, as well as an adjusting and measuring unit for such distribution valves in accordance with the introductory  
15 clauses of the independent claims.

PRIOR ART

20

Distribution valves with flow meters preferably are applied where the flow of a medium through a pipe conduit system must be set to a predetermined value over a prolonged time and shall, thereby, lend itself for a permanent and direct reading. Especially in the field of the domestic  
25 technique, such distribution valves find increasingly application for the setting of the flow of warm water through individual warm water heating circuits. A plurality of distribution valves for a respective number of heating circuits is, thereby, preferably established in that a  
30 distributor conduit, which serves as a common housing and as common inflow conduit for the distribution valves, is equipped with a corresponding number of valve units. These consist each of a branch line for the connection to the inlet

of the heating circuit and of an adjusting and measuring unit for the adjusting and displaying of the flow through the branch line, which are screwed into tapped bores in the distributor conduit located directly opposite to each other.

5 The adjustable valve gap for the adjusting of the flow rate through the branch line is established, thereby, between a valve closing body formed by the adjusting and measuring unit, which is operatively connected to a adjusting spindle of this unit, and a stationary valve seat body, and

10 especially in such manner that by a rotating of the adjusting spindle a hood shaped valve closing body is slid axially over the free end of the branch line facing the adjusting and measuring unit or, however, in such a manner that a cylinder shaped valve closing body, through which medium flowing out

15 of the valve gap at its inside flows, is slid in a direction facing away from the branch line into a conical bore in a structural member of the adjusting and measuring unit. In order to measure and display the flow rate through the branch line, the adjusting and measuring unit comprises a flow

20 against member connected to a display rod, which is arranged in a central flow channel and is displaceable together with the display rod by the flow in the flow channel against a spring force, wherewith a reading of the flow rate through the branch line is possible at the display rod. Between the

25 exit out of the valve gap and the impinging onto the flow against member, the flow is deflected typically once by  $90^\circ$  to  $180^\circ$ .

The practice has revealed that the presently known distribution valves with flow rate meters foreseen for

30 the mounting in the inlet are not suitable as shut-off valves, because they are often assembled only directly before the installation of separately produced branch lines, flow pipe distribution lines and adjusting and measuring units

sourced from different manufactures, so that the shape and position tolerances of the completed valves, which are indispensable for their leak tightness when used as shut-off valves, can hardly be ensured. It has, additionally, been  
5 evidenced that with the presently known distribution valves with flow meter suitable for the use in the inflow conduit, a precise reading of the flow rate is practically impossible because the display is relatively fluctuating also at stable conditions of operation.

10

#### DISCLOSURE OF THE INVENTION

Thus, there is the object to provide distribution  
15 valves with flow meter, a distribution arrangement with such distribution valves as well as an adjusting and measuring unit for such distribution valves, which do not have the drawbacks of the prior art or eliminate them at least partly.

This object is met by the distribution valves and  
20 the adjusting and measuring unit for such a distribution valve in accordance with the characterizing features of the independent claims.

A first aspect of the invention refers to a distribution valve with flow meter, which is mounted  
25 preferably in the inlet conduit of a warm water heating circuit. The distribution valve comprises a housing, which forms simultaneously the inlet conduit, a branch line, which extends from the housing and through which the medium coming from the inlet and flowing through the valve leaves the  
30 distribution valve, as well as an adjusting and measuring unit for the adjusting and the display of the flow rate of the medium through the branch line. The adjusting and measuring unit is made separately from the housing and is

arranged at the housing in such a manner, that it penetrates the wall of the housing directly opposite the branch line. It includes a valve closing body and an adjusting spindle, to which the valve closing body is operationally connected in  
5 such a manner that it forms, together with a valve seat body which during conventional operation is stationary relative to the housing, a valve gap, which is adjustable by a rotating of the adjusting spindle for the adjusting of the flow rate through the branch line. The adjusting and measuring unit  
10 also includes a flow against member, which is located in a flow channel through which in operation the complete amount of the medium flowing off through the branch line flows. The flow against member, thereby, is arranged in the flow channel in such a manner and is operatively connected to display  
15 means of the adjusting and measuring unit, which can be read from the outside, that its position in the flow channel proceeding from an initial position is adjustable dependent from the flow rate by the flow flowing through the flow channel and that different positions of the flow against  
20 member in the flow channel cause different displays of the display means, so that the respective flow rate through the branch line can be read at the outside of the valve. The structural member, which forms together with the valve closing body the adjustable valve gap, is concretely  
25 considered as valve seat body. As valve gap the flow cross-section is considered, which in operation basically sets the flow rate through the branch line, thus generally the smallest flow cross-section.

In accordance with the invention, the  
30 distribution valve is designed in such a manner that the flow exiting the valve gap during conventional operation is deflected, prior to its impinging onto the flow against member, at least twice, preferably in each case by at least

45°, still more preferred in each case by about 90°, namely initially in a first sense of rotation into a first direction and thereafter in a second sense of rotation opposed to the first sense of rotation into a second direction. By means of this, a S-shaped flow path from the valve gap to the flow against member results. Surprisingly it has been evidenced that this causes an especially flutter-free display of the flow rate, which leads, in comparison with the prior art, to a clear improvement of the reading precision.

10 A second aspect of the invention refers also to a distribution valve with flow meter, preferably in accordance with the first aspect of the invention, which is mounted preferably in the inlet of a warm water heating circuit. The distribution valve includes also here a housing which  
15 simultaneously forms the inlet, a branch line, which extends away from the housing and through which the medium, coming from the inlet conduit and flowing through the valve, leaves the distribution valve, as well as an adjusting and measuring unit for adjusting and displaying of the flow rate of the  
20 medium through the branch line. The adjusting and measuring unit is also formed separately from the housing and is arranged in such a manner at the housing that it penetrates the wall of the housing directly opposite the branch line. It includes also a valve closing body and an adjusting spindle,  
25 to which the valve closing body is operatively connected in such a manner that it forms together with a valve seat body, which during conventional operation is stationary relative to the housing, at least one valve gap adjustable by a rotating of the adjusting spindle for an adjusting of the flow rate  
30 through the branch line. The adjusting and measuring unit also here comprises a flow against member, which is located in a flow channel through which in operation the total amount of the medium flowing off through the branch line flows. Also

here, the flow against member is located in such a manner in the flow channel and is operatively connected with display means of the adjusting and measuring unit, which can be read from the outside, that its position in the flow channel, proceeding from a starting position, is adjustable by the flow flowing through the flow channel in dependency from the flow rate and the different positions of the flow against member in the flow channel cause different displays of the display means. By means of this, a respective flow rate through the branch line can be read at the outside of the valve. Also here, as valve seat body the structural member is concretely considered, which forms together with the valve closing body the adjustable valve gap and as valve gap the flow cross-section is considered, which in operation significantly determines the flow rate through the branch line, thus in general the smallest flow cross-section.

In accordance with the invention, the distribution valve is designed in such a manner that during conventional use a stationary housing portion of the adjusting and measuring unit contacts sealingly, preferably at the face by means of sealing surfaces and/or through a seal, such as e.g. an o-ring, a housing portion of the branch line, which is stationary during conventional use of the distribution valve, so that, in particular at distribution valves in which the valve seat body is formed by a structural member of the adjusting and measuring unit, a leakage flow from the inflow conduit into the branch line circumnavigating the valve gap is safely prevented. By means of this, distribution valves with flow meter in accordance with the invention can be provided, which due to the proper closing function between the inflow conduit and branch conduit can also be used as shut-off valves.

The distribution valve is, thereby, preferably, additionally designed such, that the structural member, which forms the walls defining the flow channel at the area in which the flow against member can be positioned by the flow  
5 during conventional operation, is located at least partly inside of the stationary housing portion of the adjusting and measuring unit, and that a seal is present between this structural member and the stationary housing member of the adjusting and measuring unit, which prevents a forming of a  
10 leakage flow from the valve gap to the exit of the branch line circumnavigating the flow channel. This seal can be obtained by a suitable design and suitable tolerances of adjacent parts and/or by means of sealing elements, such as e.g. O-rings. By means of this, distribution valves of the  
15 kind mentioned before with an excellent measuring precision can be arrived at.

It is, furthermore, of advantage if the stationary housing portion at the adjusting and measuring unit has radial or semi-axial (i.e. inclined relative to the  
20 axis of the adjusting and measuring unit) through openings with preferably circular or square shape, through which the medium can flow from the inflow conduit to the valve gap. A purely radial design allows a low-cost producing of these structural members, the semi-axial design leads to  
25 specifically low pressure losses of the flow through the through openings.

According to a further preferred embodiment of the distribution valve according to one of the previously mentioned aspects, the valve is designed in such a manner,  
30 that the valve seat body is formed by a structural member of the adjusting and measuring unit. According to a further preferred embodiment of the distribution valve according to one of the previously mentioned aspects, the valve is



designed in such a manner, that the walls of the flow channel, in the area where the flow against member can be positioned by the flow during conventional operation, are formed by a structural member of the adjusting and measuring unit. Because the adjusting and measuring unit can be provided as a pre-assembled unit for a distribution valve to be assembled on site, this embodiment leads to the advantage that the desired controlling behavior and/or the desired measuring preciseness of the distribution valve with flow meter formed thereby can be ensured independent from the precision of the production of the housing and of the branch line, so that a clear improvement of the quality is arrived at and at the same time the tolerances for the housing and the branch line can be more generous, which leads to saving of costs.

In still a further preferred embodiment of the distribution valve according to one of the before-mentioned aspects, the structural member, which forms the walls of the flow channel in that area within which the flow against member can be positioned by the flow in the flow channel during conventional operation, projects into the branch line of the distribution valve. In this way, relative compact distribution valves are arrived at, which have a small space requirement and allow the use of pipe shaped distributor conduits with a small diameter as housing. The distribution valve, thereby, is preferably designed in such a manner, for instance by a suitable specifying of the manufacturing tolerance, that a tight connection is present between the structural member, which forms the walls of the flow channel in that area in which the flow against member can be positioned by the flow, and the branch line, so that a circumnavigation of the flow channel and an erroneous

measuring of the total flow rate resulting therefrom can be safely avoided.

According to still a further preferred embodiment of the distribution valve according to one of the before mentioned aspects, the distribution valve is designed in such a manner that during conventional operation the medium, which flows from the valve gap to the flow channel, enters the flow channel through a plurality of radial openings in the wall of the flow channel, seen in the direction of flow ahead of the flow against member. It has been revealed that by this measure an improved preciseness of the reading can be arrived at.

Preferably, the radial openings are equally distributed, and by advantage on a common axial position relative to the axis of the flow channel, at the circumference of the flow channel, whereby it is also preferred that all radial openings have an identical cross-section and/or an identical cross-sectional shape. By means of this, a further equalization of the flow in the flow channel and, therewith, a further improvement of the precision of reading is arrived at.

Advantageously exactly two, preferably exactly four radial openings are present, because such openings can be formed especially economically by a radial drilling through the structural member forming the flow channel in this area and lead to a low flow resistance through the distribution valve.

In still a further preferred embodiment of the distribution valve according to one of the before-mentioned aspects, the valve is designed in such a manner that the valve gap is formed by a concentric immersing of a conically shaped body structure of the valve closing body, preferably with the smaller diameter facing against the branch line,

into a cylinder shaped or conical bore of the valve seat body, so that the valve gap seen in the direction of flow is a annular gap of which the width of the gap decreases at an increasing immersing of the valve closing body into the bore  
5 of the valve seat body until it has a minimal value or equals zero. By means of this, distribution valve with a especially sensitive control behavior can be provided.

In still a further preferred embodiment of the distribution valve in accordance with one of the before-  
10 mentioned aspects, the valve is designed in such a manner that the cross-section of the flow channel broadens in the direction of flow in the area where the flow against member can be positioned during conventional operation by the medium flowing therethrough, namely preferably broadens conically or  
15 trumped-shaped. Such a design allows a wide range of measurements and simultaneously a high measuring precision at low flow rates.

In still a further preferred embodiment of the distribution valve according to one of the before-mentioned  
20 aspects, the adjusting spindle, the valve closing body and the flow channel are formed by a one-piece component, preferably by a one-piece plastic part, which preferably has been produced by injection molding.

In still a further preferred embodiment of the distribution valve according to one of the before-mentioned  
25 aspects, the display means comprise a display rod, in particular equipped with a display marking, operated by the flow against member as well as an adjusting member for a manual operating of the adjusting spindle, which completely  
30 encloses the outwards directed free end of the display rod and is at least partly transparent and is preferably provided with a scale, in order to allow a reading of the respective

position of the display rod relative to the adjusting member and accordingly of the flow rate through the branch line.

Preferably, the adjusting member is additionally rigidly connected to the adjusting spindle, whereby the  
5 adjusting spindle and the adjusting member are formed by a one-piece component of a transparent plastic material. By means of this, especially low-cost distribution valves with flow meter can be provided.

A third aspect of the invention refers to a  
10 distribution arrangement with two or more distribution valves in accordance with one of the before-mentioned aspects of the invention. In particular when producing a plurality of distribution valves by screwing in of a plurality of adjusting and measuring units into a distributor conduit with  
15 a corresponding number of branch lines forming a common housing, the advantages of the invention become clearly visible.

A fourth and last aspect of the invention refers to a adjusting and measuring unit, which leads together with  
20 a corresponding housing and a corresponding branch line to a distribution valve or a distribution arrangement according to one of the before-mentioned aspects of the invention.

## 25 BRIEF DESCRIPTION OF THE DRAWINGS

Further advantages and applications of the invention arise from the now following description with reference to the drawings, in which there is illustrated in:

30 Figure 1 a section through a first distribution valve with flow meter in accordance with the invention;

Figure 2 a section through a second distribution valve with flow meter in accordance with the invention;

Figure 3 a section through a third distribution valve with flow meter in accordance with the invention;  
Figure 4 a section through a forth distribution valve with flow meter in accordance with the invention;  
5 Figure 5 a section through a fifth distribution valve with flow meter in accordance with the invention;  
Figure 6 a section through a sixth distribution valve with flow meter in accordance with the invention;  
Figure 6a on an enlarged scale an illustration of  
10 the central part of the distribution valve of Figure 6 in the opened state and in section;  
Figure 7 a section through a seventh distribution valve with flow meter in accordance with the invention; and  
Figure 8 a section through an eighth distribution  
15 valve with flow meter in accordance with the invention.

#### MODES FOR CARRYING OUT THE INVENTION

20 Various embodiments of the distribution valve unit flow meter in accordance with the invention are illustrated in the Figures 1 to 8. Whereas all completely illustrated distribution valves (Figures 1 - 8) are illustrated in a closed state, the partial illustration on a  
25 enlarged scale in Figure 6a illustrates the distribution valve of Figure 6 in an opened state.

All the illustrated distribution valves have in common that they are foreseen for controlling the amount of flow through a warm water heating circuit and were formed by  
30 screwing of an adjusting and measuring unit 1 and a branch line 2 from the outside into two oppositely located tapped bores of an inflow distributor conduit 3, which serves as housing and inflow conduit. The branch line 2, thereby,

serves as discharging conduit and is, in the present case, provided at its free end with an outer thread for the connecting to the inflow line of the warm water heating circuit. The adjusting and measuring unit 1 serves for  
5 adjusting and displaying of the warm water flow rate through the branch line 2 and includes, at the distribution valves illustrated in the Figures 1 - 8, all structural members with the exception of the branch line 2 and the distributor conduit 3 forming the housing. In all illustrated  
10 embodiments, it includes a conical shaped valve closing body 5 supported by an adjusting spindle 4, which forms by a concentric immersing into a cylinder shaped bore in a valve seat body 6, which at conventional operation is stationary relative to the distributor conduit 3, together with this  
15 valve seat body 6 a valve gap which is adjustable by a rotating of the valve spindle 4, so that the width of the valve gap decreases at a increasing immersing of the valve closing body 5 into the cylinder-shaped bore of the valve seat body 6 until it reaches a minimal value. The sealing at  
20 the completely closed valve occurs at all illustrated distribution valves through an abutment shoulder 19, possibly together with a valve sealing ring 20 (see Figures 6 - 8). Furthermore, the adjusting and measuring unit 1 includes at all illustrated valves a knob shaped flow against member 7,  
25 which is located in a conical flow channel 10, through which the entire amount of water, which leaves the distribution valve through the branch line 2, flows. The flow against member 7 is connected to a display rod 9, which is acted upon by a spiral spring 8 with a spring force opposite the  
30 direction of flow S through the branch line 7. The flow against member 7, thereby, is arranged in such a manner in the flow channel 10 that it is positioned together with the display rod 9, starting from a initial position in which it

is positioned by the display rod 9 which is acted upon by the spring force if no flow through the flow channel 10 occurs, and upon a flow through the flow channel 10 can be displaced dependent from the flow rate against the force of the spring, so that a certain axial position of the flow against member 7 and the display rod 9 in the flow channel 10 corresponds to a certain flow rate through the flow channel 10. The outwards oriented free end of the display rod 9 includes a dish-shaped abutment 12 for the spring 8, which has a color marking at its circumference and accordingly forms a display marking and which is completely enclosed at all illustrated distribution valves by a transparent plastic hood 11. At all illustrated valves, this plastic hood 11 is firmly connected to the adjusting spindle 4, so that it serves as an adjusting member for a manual adjusting of the adjusting spindle 4 and displaces upon a rotating of the spindle 4 axially together with the spindle relative to the parts of the distribution valve which are stationary relative to the housing. The transparent plastic hood 11 is equipped in the axial direction with a scale (not illustrated) for the flow rate, so that the respective position of the display rod 9 relative to the scale on the plastic hood 11, and thus, also the flow rate through the branch line 2 can be read from the outside.

In the distribution valves illustrated in the Figures 1 - 5, the valve seat body 6 is formed by the adjusting and measuring unit housing 13, which unites all main components of the adjusting and measuring unit 1 to one unit and is firmly connected to the distributor conduit 3 through a thread. By means of this, the advantage is arrived at that an exact alignment exists between the valve closing body 5 and the valve seat body 6 independent from possible manufacturing tolerances of the distributor conduit 3 and/or the branch line 2, and that the dimensional accuracy of these

parts can be ensured in a simple manner, so that the desired control characteristics and leak tightness always are ensured.

As clearly can be seen, the valve gap is formed  
5 in all illustrated distribution valves by an immersing of the cone-shaped valve closing body 5 in the direction of flow S of the branch line 2 or flow channel 10, respectively, into the cylinder-shaped opening of the valve seat body 6. In the distribution valves illustrated in the Figures 1 - 5, the  
10 stationary adjusting and measuring unit housing 13, which forms in the distribution valve illustrated in the Figures the valve seat body 6, additionally extends from the valve gap in direction to the branch line 2, namely in the present embodiment precisely up to the branch line 2, where it at its  
15 front side contacts in a water pressure tight manner through a sealing by means of a O-ring the branch line 2. Obviously, also other kinds of the contact and sealing can be thought of, whereby, however, the illustrated front side variant has the advantage that it is relatively unproblematic with  
20 respect to deviations of the shape and the position of the structures involved. The inflow from the inflow line formed by the distributor conduit 3 to the valve gap formed by the valve closing body 5 and the valve seat body 6 proceeds at these distribution valves through four circular radial  
25 through openings 15 distributed uniformly on a common axial position along the circumference of the adjusting and measuring unit housing 13. The design illustrated in the Figures 1 - 5 leads to the advantage that a leakage flow from the distributor conduit 3 to the branch line 2, which would  
30 circumnavigate the valve gap and would lead in case of a closed valve to a leakage out of the branch line 2, is reliably prevented by the described sealing between the stationary structures 13, 2.



In the distribution valves illustrated in the Figures 3 - 6, the flow channel 10 is formed by that structure of the adjusting and measuring unit 1, which also forms the valve closing body 5. By this design, the walls which define the flow channel 10 in the area within which the flow against member 7 can be positioned during conventional operation by the forces of the flow and which, therefore, are of a special importance regarding the precision of the measuring, are formed by a structure of the adjusting and measuring unit 1, which leads to the advantage that a precise axial and also radial alignment is reached between the mentioned walls of the flow channel 10 and the flow against member 7 independently from possible manufacturing tolerances of the distributor conduit 3 and/or the branch line 2 in a simple manner, and that the preciseness regarding dimensions of these parts can be assured in a simple way, so that a higher preciseness regarding dimensions is ensured.

Furthermore, the adjusting spindle 4, the valve closing body 5 and the flow channel 10 are formed in the distribution valves illustrated in the Figures 3 - 6 by a one-piece injection molded plastic part, wherewith such distribution valves consist of relatively few individual parts or can be produced at especially low costs.

As clearly can be seen, the flow channel 10 of the valves illustrated in the Figures 3 - 6 is formed without exception by a free end of the cylinder shaped outer contour of the structure which also forms the valve closing body 5, whereby this free end projects axially into a corresponding cylinder-shaped bore hole in the branch line 2. In order to prevent a forming of a leakage flow from the valve gap to the exit of the branch line 2, which would circumnavigate the flow channel 10 and would, therefore, lead to a erroneous measuring, this free unit is sealed against the branch line 2

such that a rotation as well as also an axial translatic movement of this free end is possibly without being detrimental to the sealing. In the valve variants illustrated in the Figures 3 and 6, this is reached by direct bordering of a sealing ring 16 located at the cylinder shaped outer contour of the free end at the wall of a cylinder shaped bore hole in the branch line 2. In the distribution valves of the Figures 4 and 5, however, the sealing is achieved indirectly, namely in that the free end is also sealed by a O-ring 16 (Figure 4) or, however, by a sealing bead 17 (Figure 5) made one-piece with same, against the stationary adjusting and measuring unit housing 13, which housing 13 is in turn sealed against the branch line 2.

In the distribution valves illustrated in the Figures 2 - 7, the inflow of the water coming from the valve gap into the entry area of the flow channel 10 proceeds through a plurality of radial openings 18 in the wall of the flow channel 10, which, seen in the direction of flow S, are located ahead of the flow against member 7 located, if no flow through the flow channel 10 is present, in its initial position. In the illustrated embodiment two or four, respectively radial openings 18, all with an identical cross-section and identical cross-sectional shape, are located on a common axial position uniformly along the circumference of the flow channel 10, whereby the distribution valves illustrated in the Figures 2 - 3 and 6 - 7 have circular radial openings 18 and the distribution valve illustrated in Figure 5 has radial openings 18 with a substantially quadratically cross-section and rounded corners. This design leads to a especially uniform flow against the flow against member 7 in the flow channel 10, wherewith a stabilized and, therefore, good readability of the flow rate can be achieved.

Such as can be seen best in Figure 6a, which shows an enlarged partial illustration of the distribution valve 6 in the opened state and subjected to a flow through the valve and in which the flow from the inflow conduit  
5 through the valve gap and into the flow channel 10 is represented by a plurality of arrows, the guiding of the flow occurs at all illustrated distribution valves in such a manner between the valve gap and the flow against member 7 that the flow is deflected twice after its exiting from the  
10 valve gap and prior to its impinging onto the flow against member 7, namely firstly in a first sense of rotation from a substantially vertical direction of flow into a first, substantially horizontal direction of flow, with which it enters the entry area of the flow channel 10, and thereafter  
15 in a second sense of rotation, which is opposite the first sense of rotation, into a second, again vertical direction of flow, in which direction it impinges onto the flow against member 7. Accordingly, the flow is deflected S-like between the valve gap and the flow against member 7, which also adds  
20 to an attenuation of the oncoming flow at the flow against member 7 with the already mentioned advantageous effects.

While preferred embodiments are described in the present application, it shall distinctly be understood that the invention is not restricted to same and may be otherwise  
25 practiced within the scope of the following claims.

## CLAIMS

1. Distribution valve with flow meter, in particular for the use in the inlet of a hot water heating circuit, with a housing (3) forming the inflow conduit, a branch line (2) extending from the housing (3) and an adjusting and measuring unit (1) formed separately from the housing (3) and arranged at the housing (3) opposite the branch line (2) and penetrating the housing wall, for the adjusting and displaying of a flow rate of a medium flowing through the branch line (2), wherein the adjusting and measuring unit (1) comprises a valve closing body (5), which is operatively connected to an adjusting spindle (4) in such a manner that it forms together with a valve seat body (6), which during conventional operation is stationary relative to the housing (3), a valve gap, which is adjustable by a rotating of the adjusting spindle (4) for the adjusting of the flow rate, and wherein the adjusting and measuring unit (1) includes a flow against member (7), which is located in a flow channel (10), through which in operation substantially the complete medium flowing off through the branch line (2) flows, wherein the position of the flow against member (7) in the flow channel (10) is adjustable beginning from a starting position by a flow which flows from the valve gap to the branch line (2) dependent from the flow rate, and wherein the flow against member (7) is operatively connected to display means (9, 11, 12) of the adjusting and measuring unit (1), which may be read off from the outside, in such a manner that different positions of the flow against member (7) in the flow channel (10) cause different displays of the display means (9, 11, 12), wherewith the respective flow rate through the branch line (2) can be read at the valve at its outside,

characterized in that the distribution valve is designed in such a manner that the flow exiting the valve gap during conventional operation is deflected prior to its impinging onto the flow against member (7) at least twice, in particular in each case by at least  $45^{\circ}$ , in particular in each case by about  $90^{\circ}$ , namely initially by a first sense of rotation in a first direction and thereafter by a second sense of rotation opposed to the first sense of rotation in a second direction.

2. Distribution valve with flow meter, in particular according to claim 1, in particular for the use in the inlet of a hot water heating circuit, with a housing (3) forming the inflow conduit, a branch line (2) extending from the housing (3) and arranged at the housing opposite the branch line (2) and penetrating the housing wall for the adjusting and displaying of a flow rate of a medium flowing through the branch line (2), wherein the adjusting and measuring unit (1) comprises a valve closing body (5), which is operatively connected to an adjusting spindle (4) in such a manner that it forms together with a valve seat body (6), which during conventional operation is stationary relative to the housing (3), a valve gap which is adjustable by a rotating of the adjusting spindle (4) for the adjusting of the flow rate, and wherein the adjusting and measuring unit (1) includes a flow against member (7), which is located in a flow channel (10) through which in operation substantially the complete medium flowing off through the branch line (2) flows, wherein the position of the flow against member (7) in the flow channel (10) is adjustable beginning from a starting position by a flow which flows from the valve gap to the branch line (2) dependent from the flow rate; and wherein the flow against member (7) is operatively connected to display means (9, 11, 12) of the adjusting and measuring unit (1)

which may be read from the outside in such a manner that different positions of the flow against member (7) in the flow channel (10) cause different displays at the display means (9, 11, 12), wherewith the respective flow rate through the branch line (2) can be read at the valve at the outside, characterized in that a housing section (13) of the adjusting and measuring unit (1), which is stationary during conventional operation of the distribution valve, sealingly contacts, in particular at the face end by sealing surfaces and/or by a seal (14), a housing portion of the branch line (2) which is stationary during the conventional use of the distribution valve.

3. Distribution valve according to claim 2, characterized in that the structural member, which forms the walls defining the flow channel (10) at least in the area in which the flow against member (7) can be positioned by the flow during conventional operation, is arranged at least in part inside of the stationary housing section (13) of the adjusting and measuring unit (1), and that this structural member and the stationary housing section (13) are designed in such a manner and/or sealing elements (16) are arranged between them in such a manner, that a forming of a leakage flow from the valve gap to the exit of the branch line (2) by bypassing the flow channel (10) is reliably prevented.

4. Distribution valve according to one of the claims 2 to 3, characterized in that the stationary housing section (13) of the adjusting and measuring unit (1) comprises radial or half-axial throughflow openings (15), in particular of a circular or square shape, through which the medium can flow from the inflow conduit to the valve gap.

5. Distribution valve according to one of the preceding claims, characterized in that the valve seat body

(6) is formed by a structural member (13) of the adjusting and measuring unit (1).

6. Distribution valve according to one of the preceding claims, characterized in that the walls defining the flow channel (10), at least within the area in which the flow against member (7) can be positioned by the flow during the conventional operation, are formed by a housing section (13) of the adjusting and measuring unit (1).

7. Distribution valve according to one of the preceding claims, characterized in that the structural member, which forms the walls defining the flow channel (10), at least in the area in which the flow against member (7) can be positioned by the flow during conventional operation, projects into the branch line (2), and in particular that this structural member and the branch line (2) are designed in such a manner and/or sealing elements (16) are present between them in such a manner, that a formation of a leakage flow from the valve gap to the exit of the branch line (2) reliably is prevented.

8. Distribution valve according to one of the preceding claims, characterized in that the distribution valve is designed in such a manner that the flow flowing during conventional operation from the valve gap to the flow channel (10) enters the flow channel (10) through several radial openings (18) in the wall of the flow channel (10) ahead of the flow against member (7) seen in the direction of flow.

9. Distribution valve according to claim 8, characterized in that the radial openings (18) are respectively uniformly distributed, in particular along a common axial position, at the circumference of the flow channel (10), and in particular that all openings (18) have an identical cross-section and/or an identical shape.

10. Distribution valve according to one of the claims 8 to 9, characterized in that exactly two or exactly four radial openings (18) are present.

11. Distribution valve according to one of the preceding claims, characterized in that the distribution valve is designed in such a manner that the valve gap is formed by a concentric immersion, in particular in the direction of the through flow (S) of the branch line (2), of a conically shaped body of the valve closing body (5) into a in particular cylindrically shaped bore of the valve seat body (6), so that the valve gap, seen in the direction of flow, is a circular ring shaped gap of which the width of the gap decreases with a increasing immersing of the valve closing body (5) into the bore of the valve seat body (6) until it has a minimal value or amounts to zero.

12. Distribution valve according to one of the preceding claims, characterized in that the cross-section of the flow channel (10) broadens in the direction of flow in the area in which the flow against member (7) may be positioned at conventional operation by the flow flowing in same, and in particular in that the flow channel (10) is conically shaped in this area.

13. Distribution valve according to one of the preceding claims, characterized in that the adjusting spindle (4), the valve closing body (5) and the flow channel (10) are formed by an one-piece component which in particular is an one-piece injection molded part of a plastic material.

14. Distribution valve according to one of the preceding claims, characterized in that the display means (9, 11, 12) comprise a display rod (9), operated by the flow against member (7) having in particular a display marking, and an adjusting member (11) for a manual operating of the adjusting spindle (4), which completely encloses the outwards



oriented free end of the display rod (9) and is at least partly transparent, and in particular is equipped with a scale for allowing a reading off of the respective position of the display rod and thereby of the flow rate through the branch line (2).

15. Distribution valve according to claim 14, characterized in that the adjusting member (11) is rigidly connected to the adjusting spindle (4), and in particular that the adjusting spindle (4) and the adjusting member (11) are formed by a one-piece component, in particular of a transparent plastic material.

16. Distribution arrangement, comprising at least two distribution valves according to one of the preceding claims.

17. Adjusting and measuring unit (1) for the distribution valves or the distribution arrangement according to one of the preceding claims.

Fig. 1

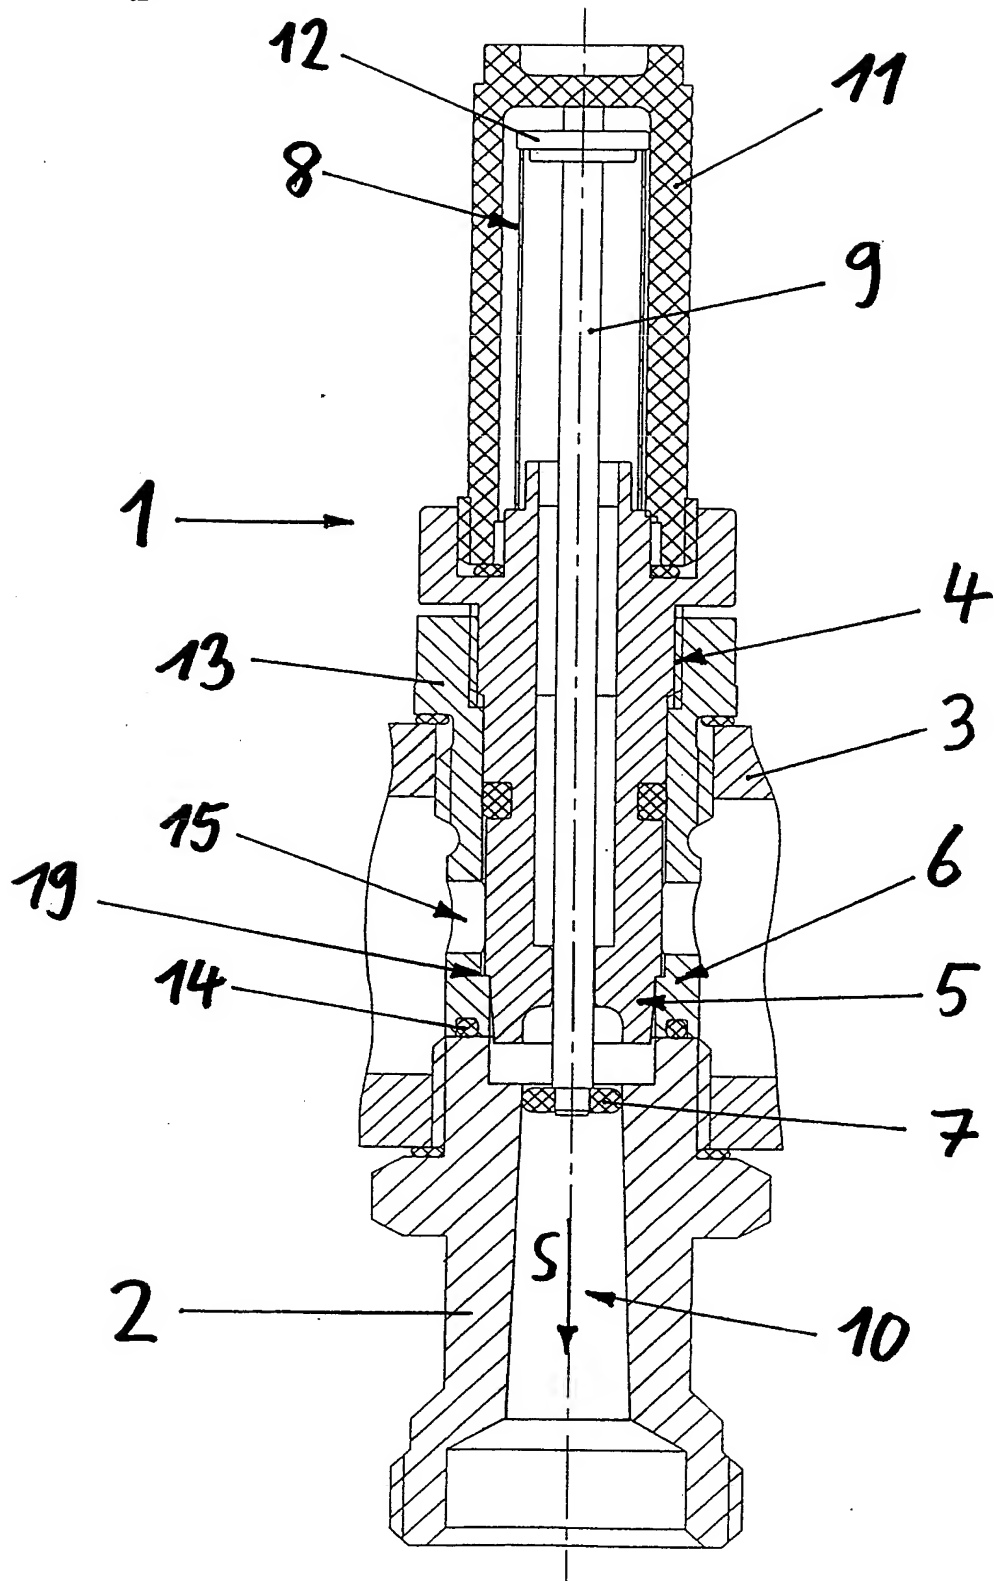


Fig. 2

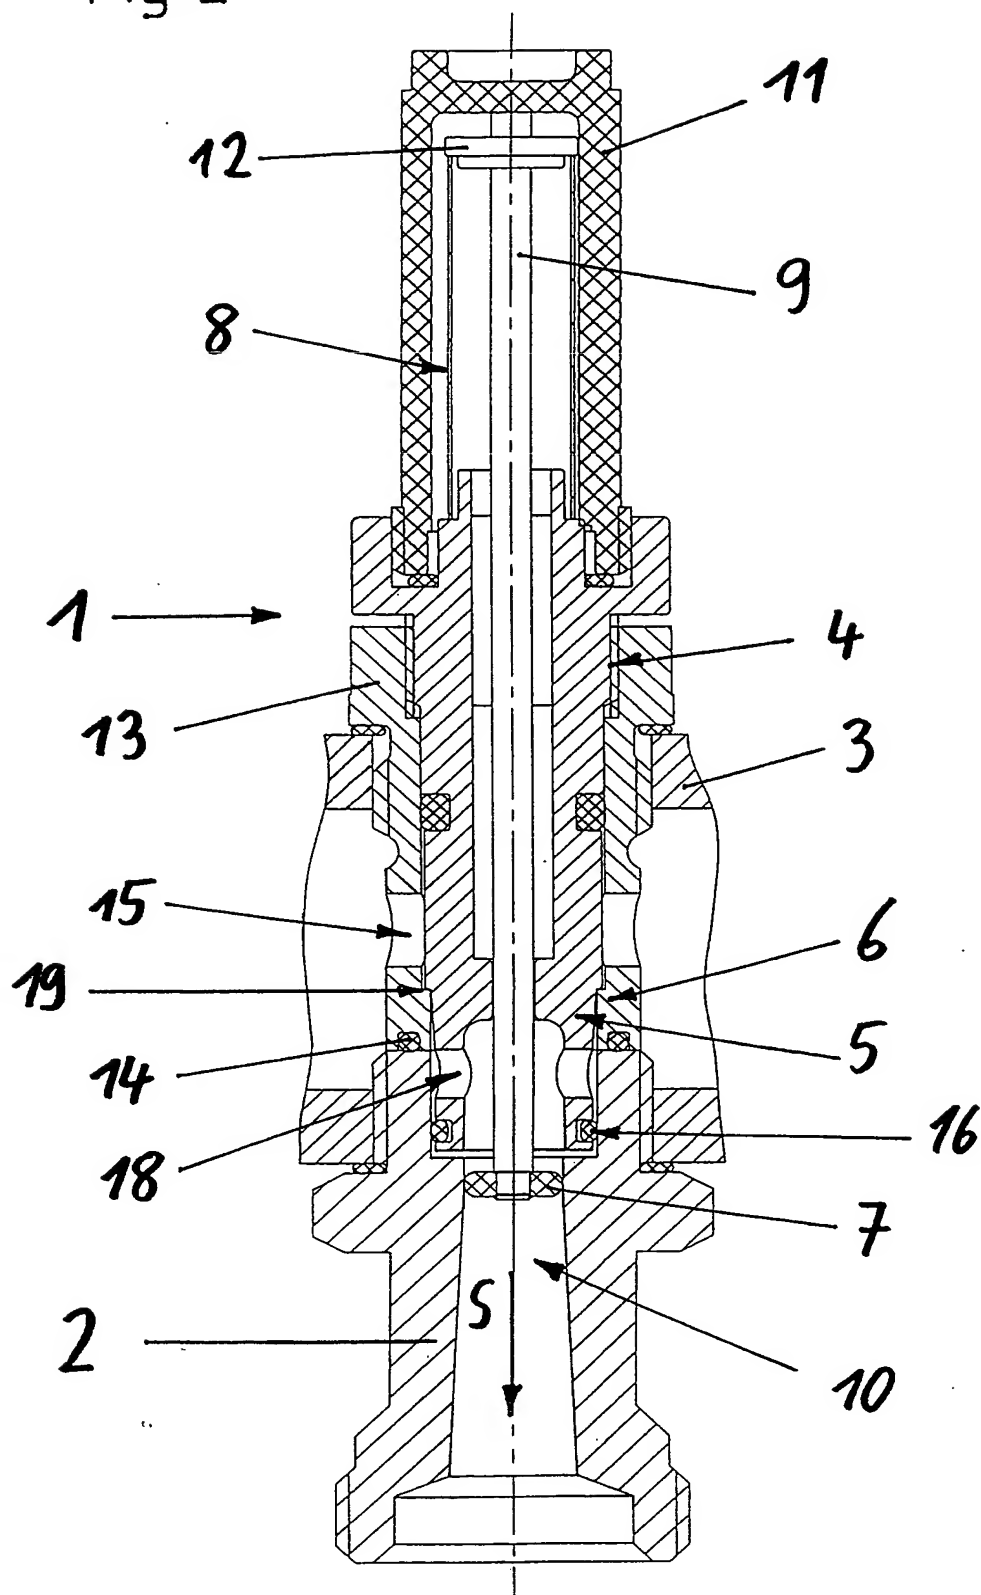


Fig. 3

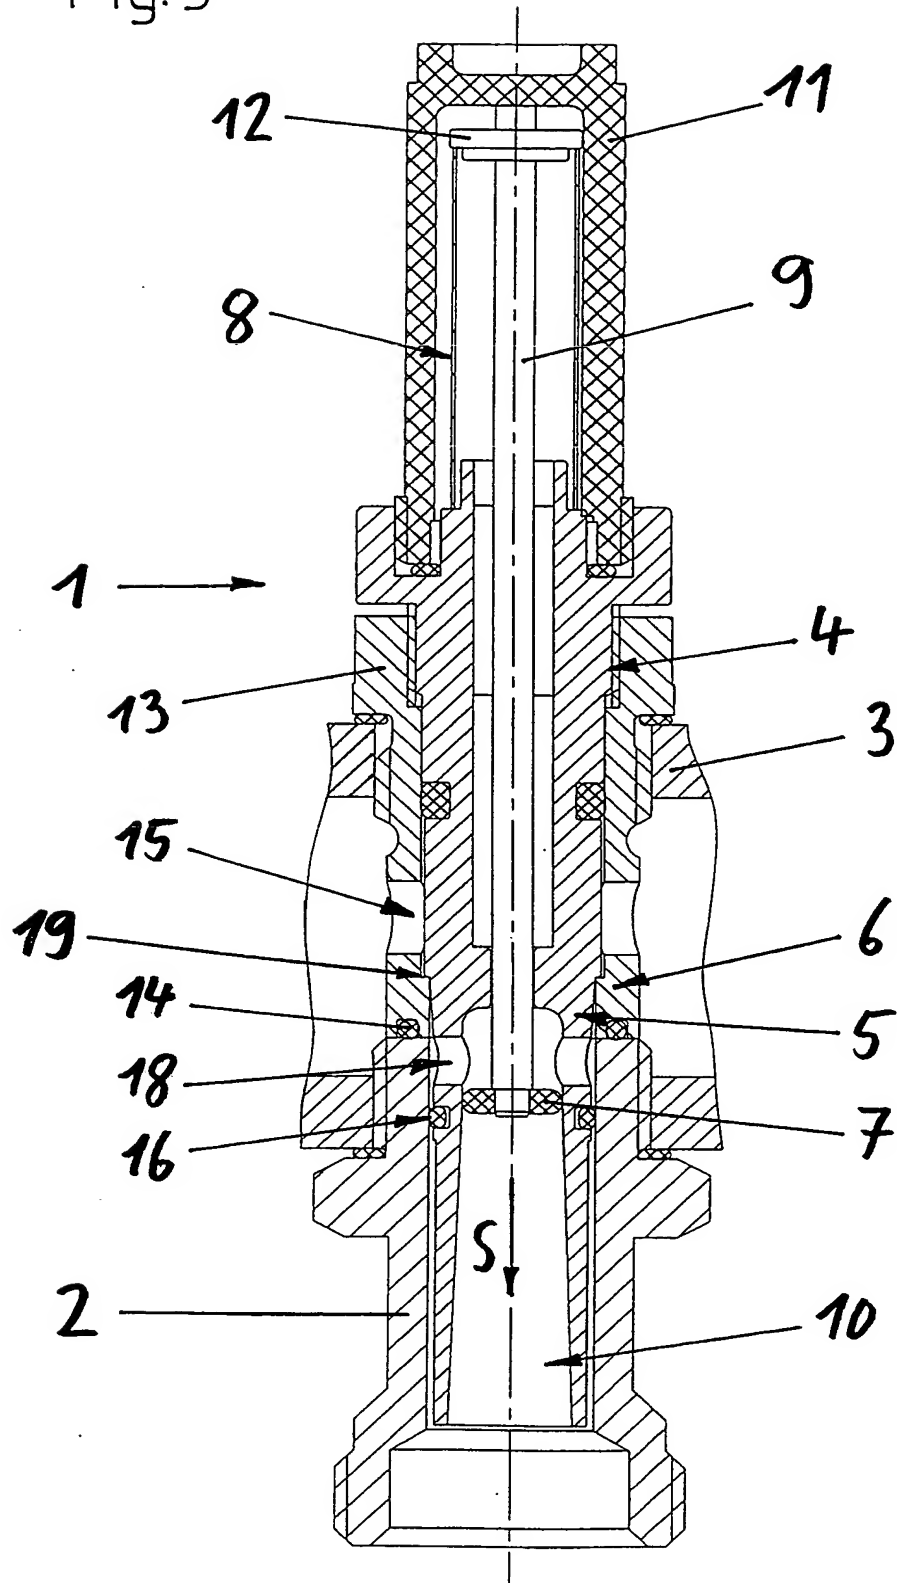


Fig.4

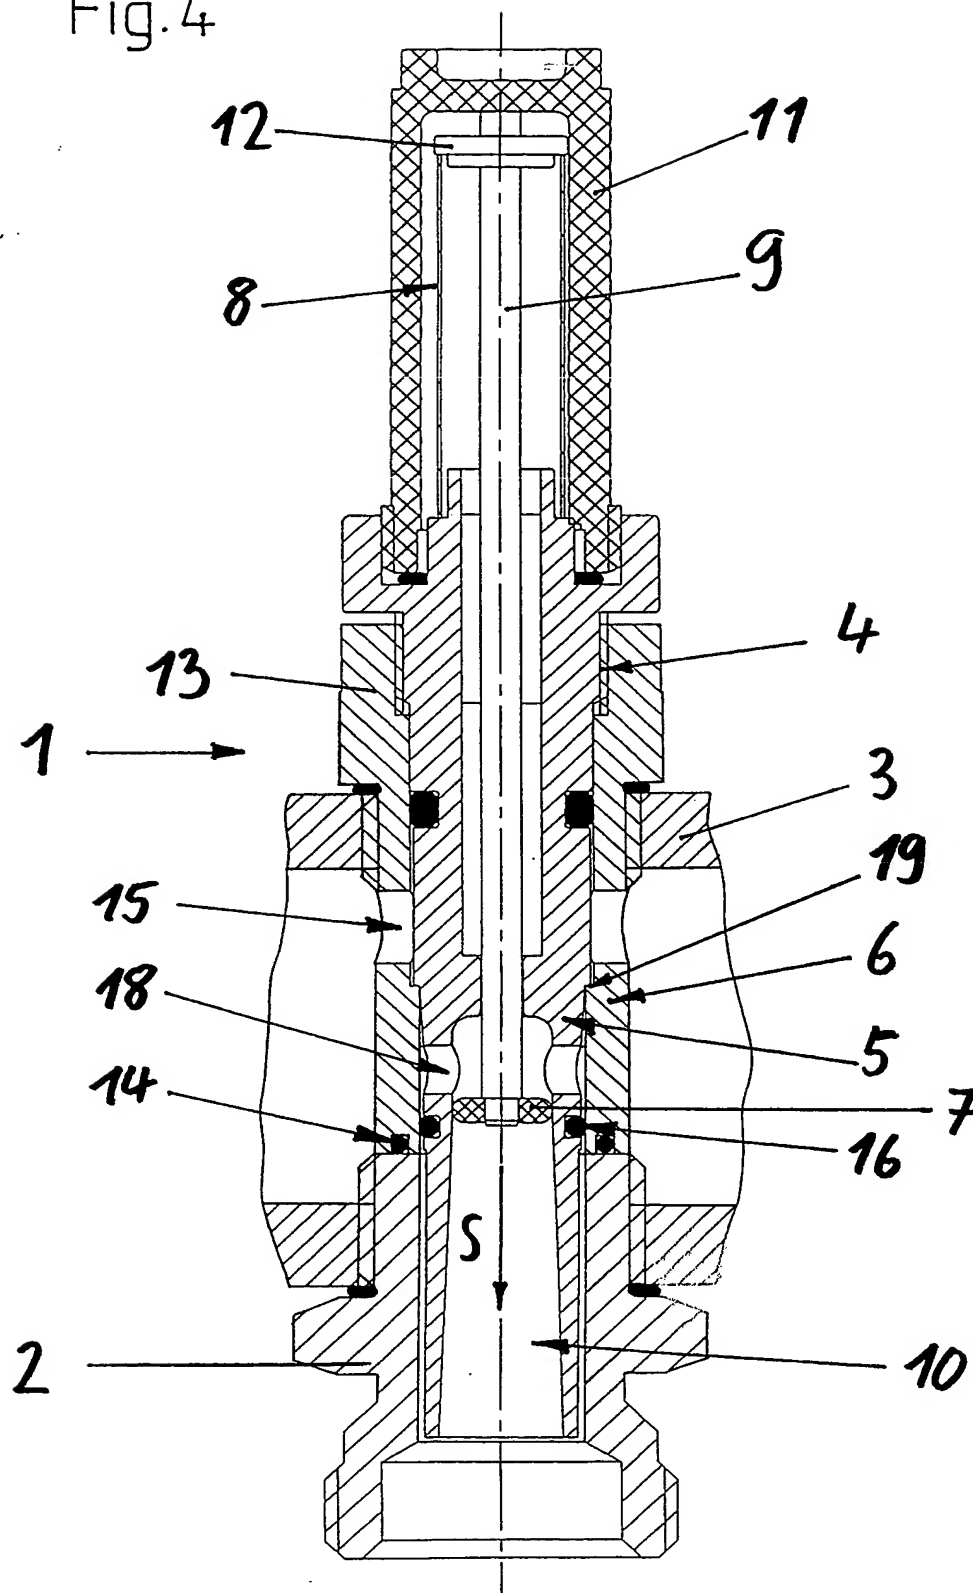


Fig.5

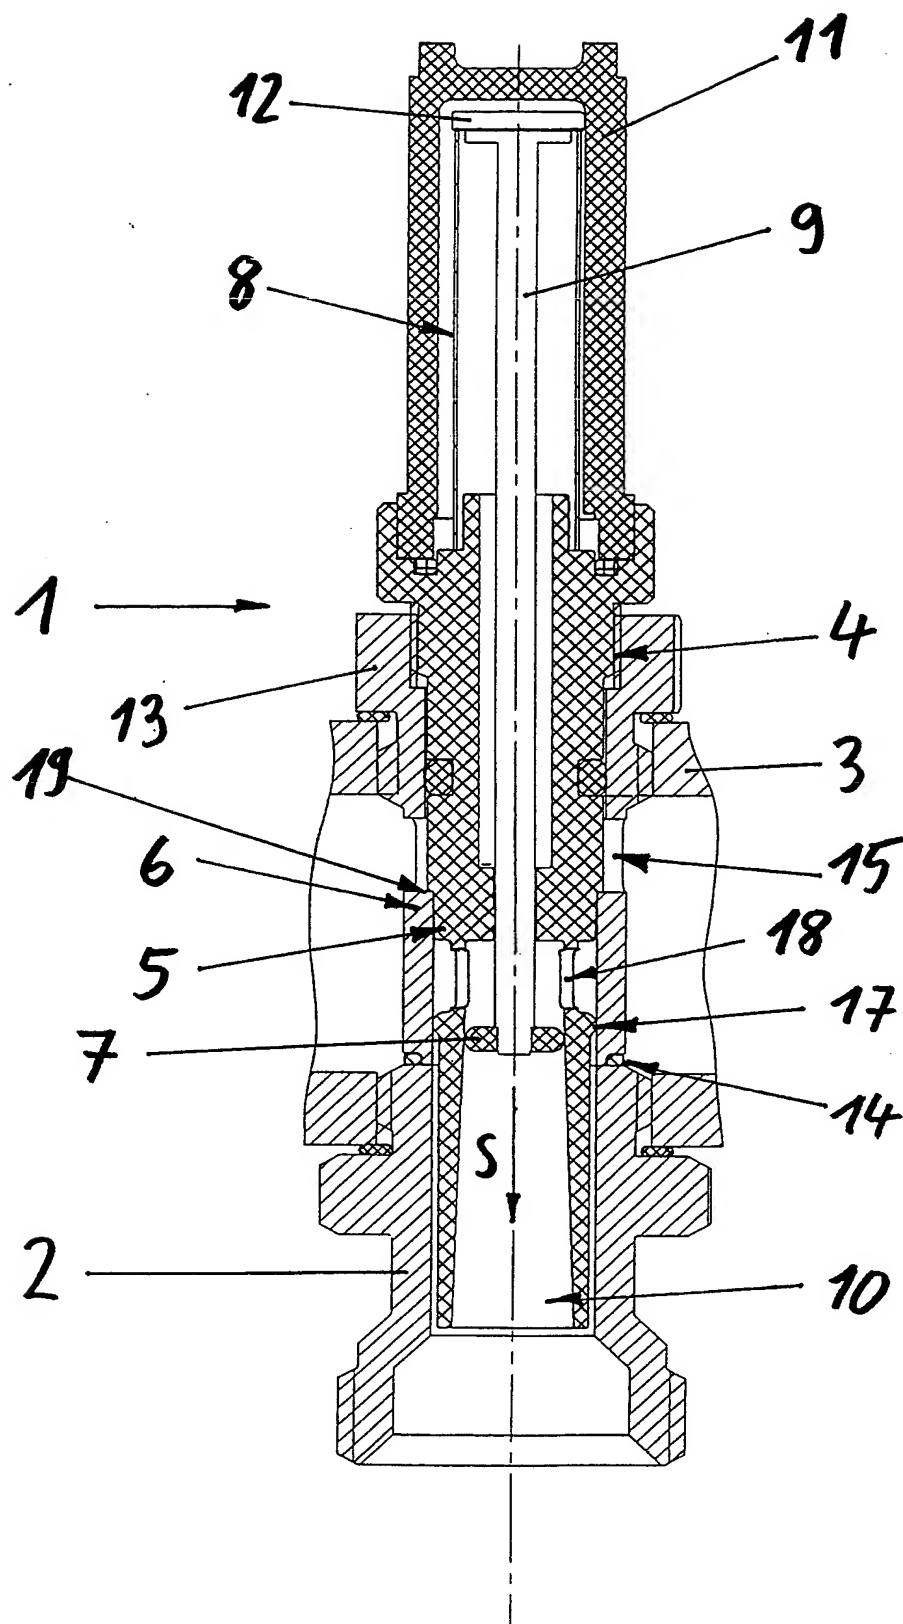


Fig. 6

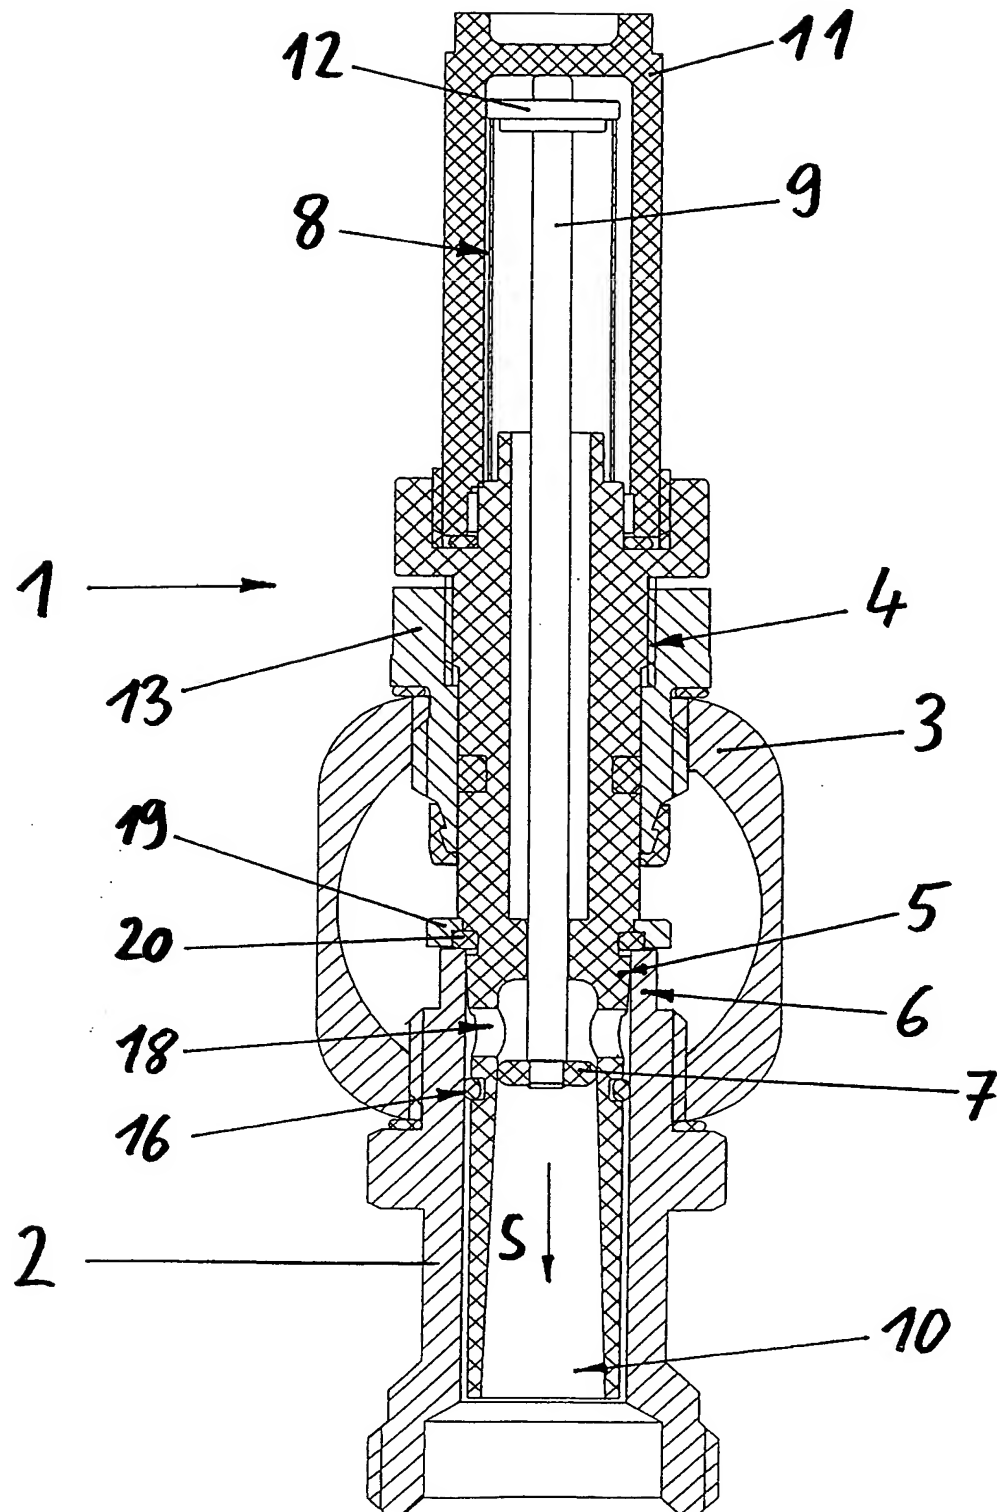


Fig.6a

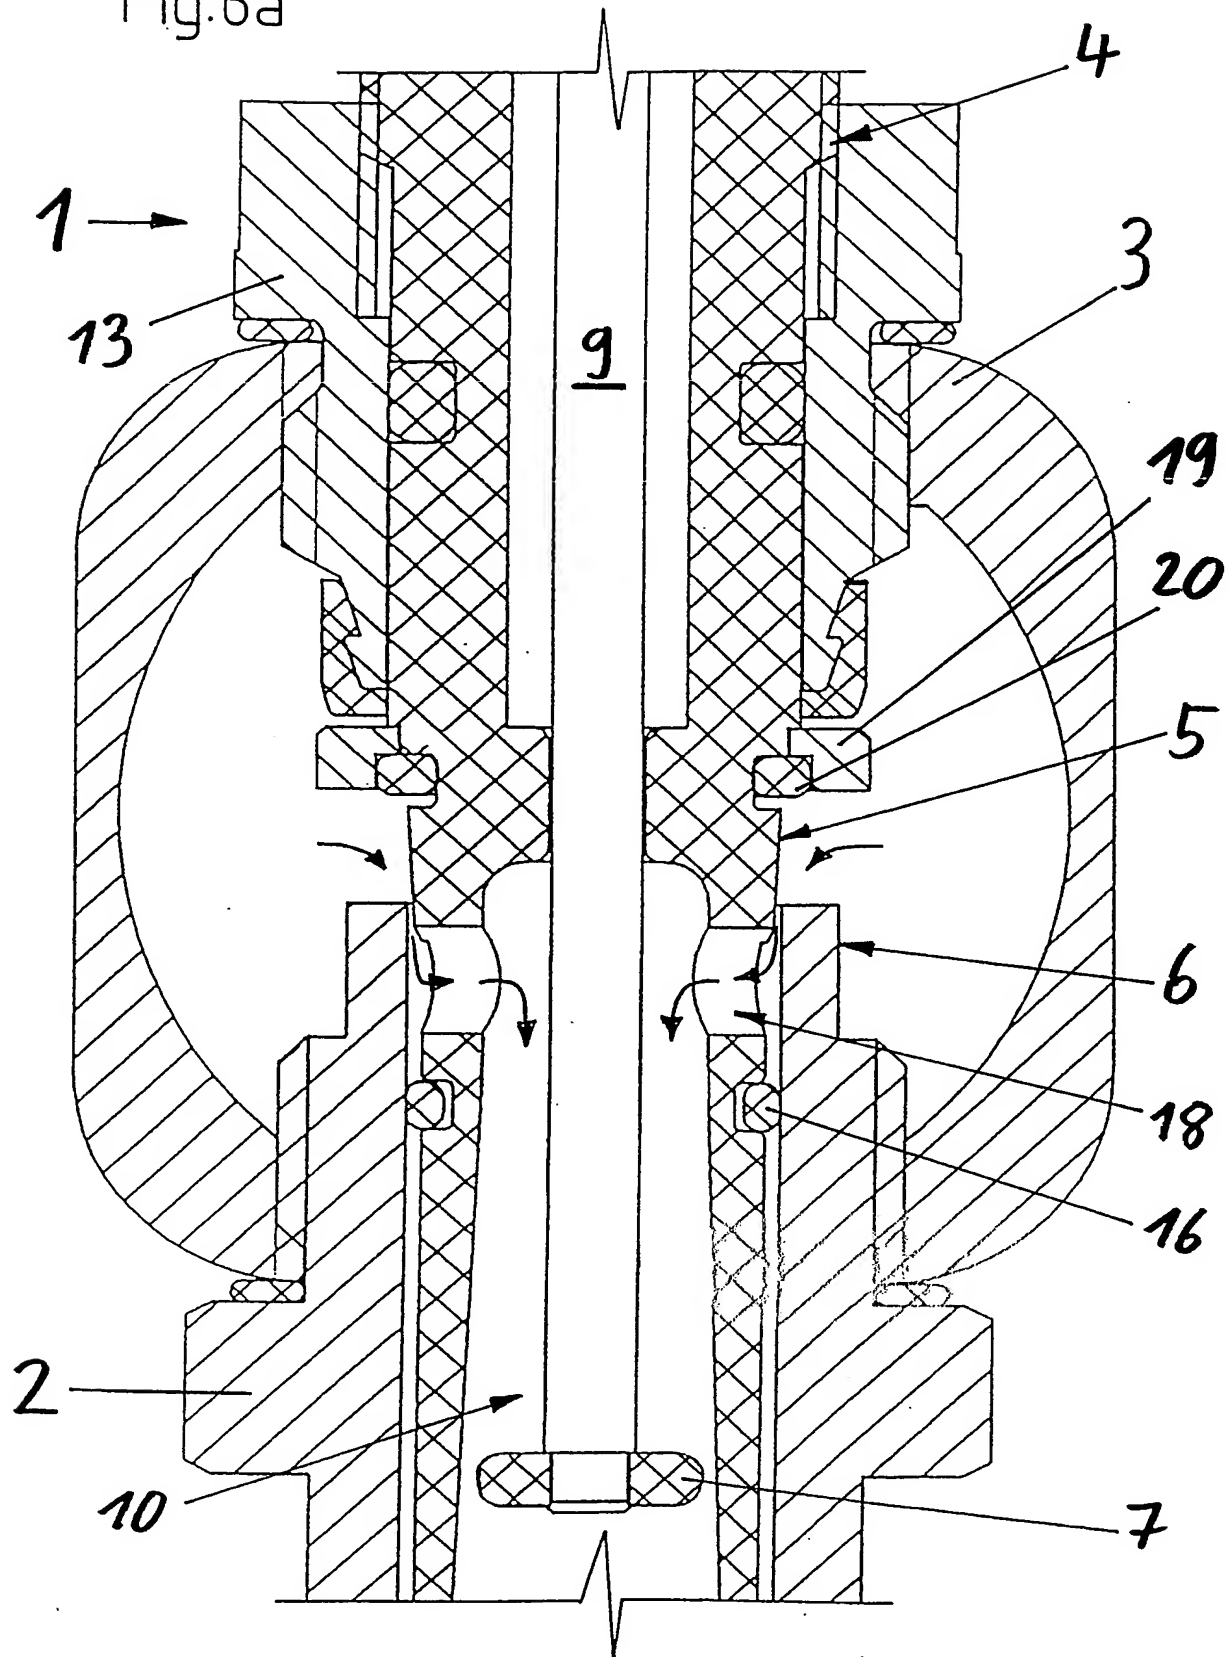




Fig. 7


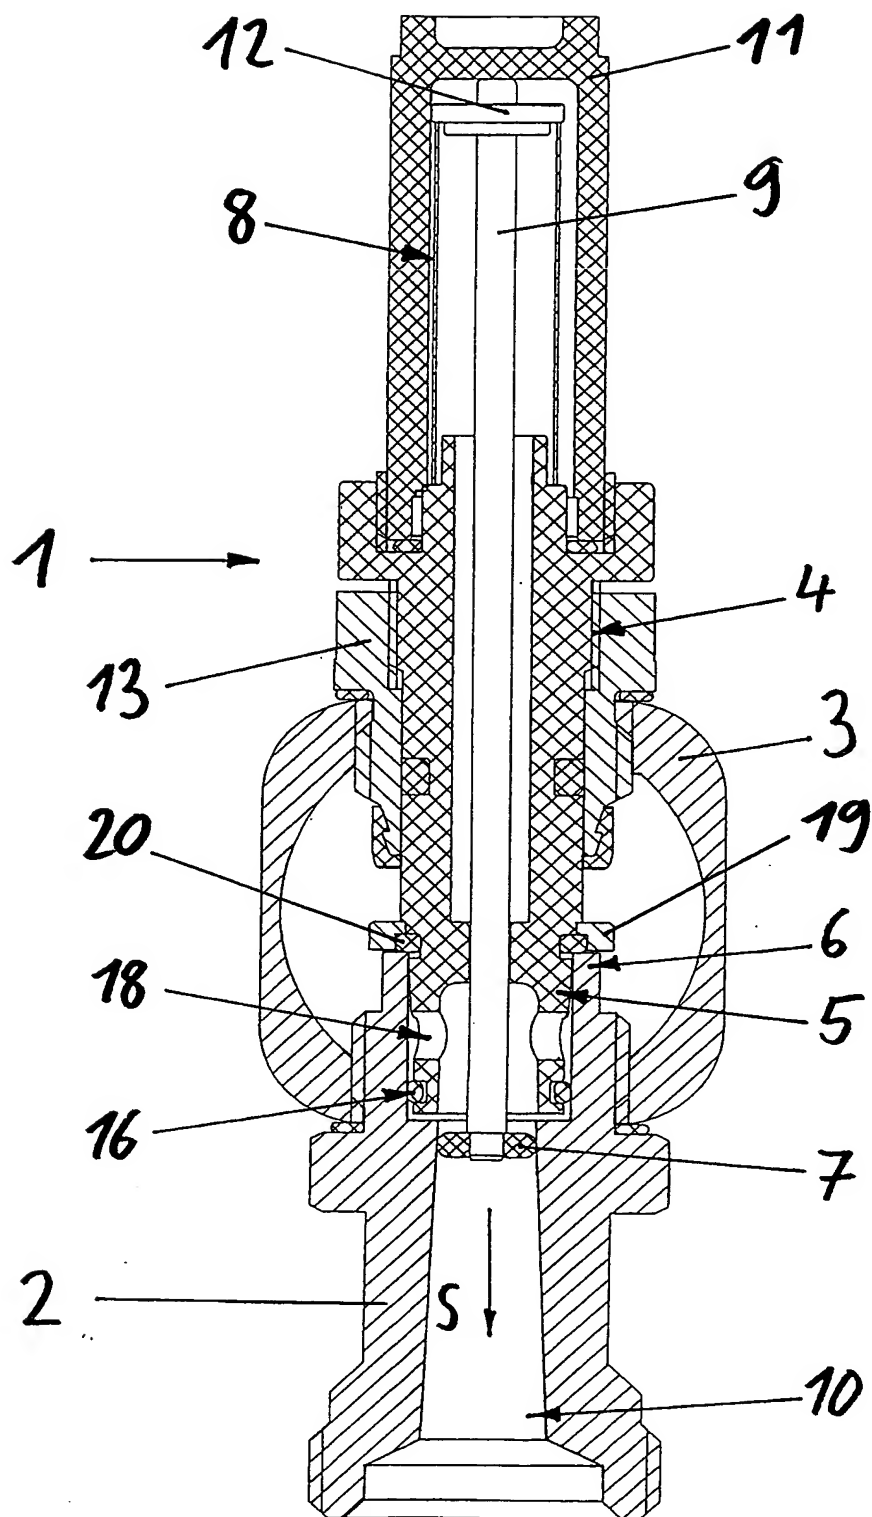


Fig. 8

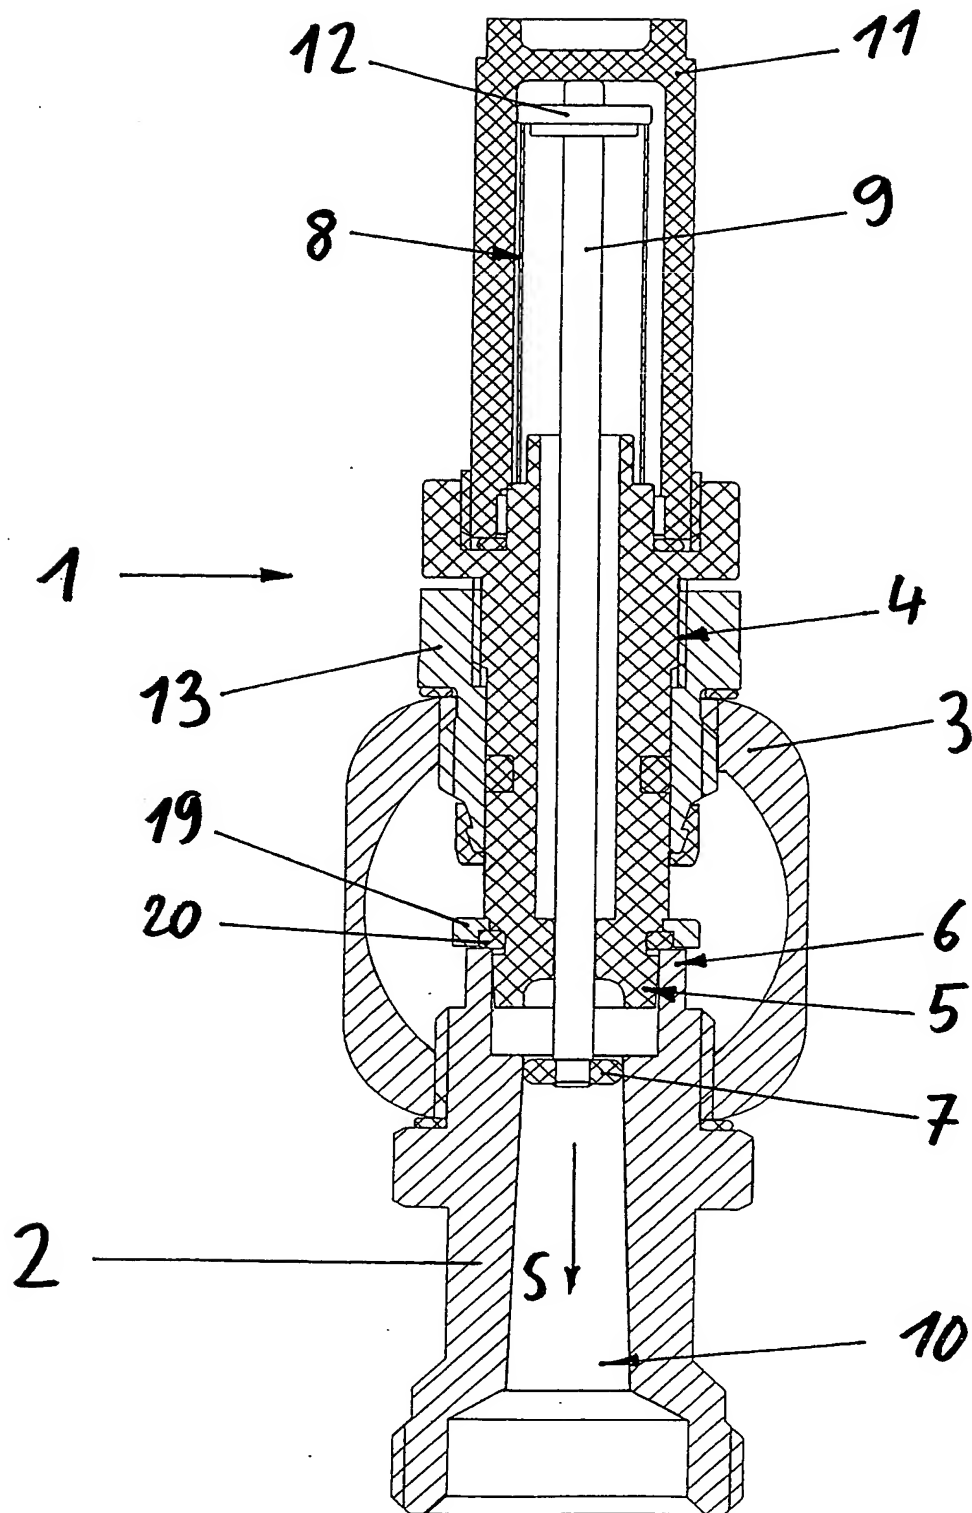

# INTERNATIONAL SEARCH REPORT

PCT/IB 02/01382

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 F24D19/10 G01F1/26

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F24D F24H G01F F16K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y A	DE 100 38 874 A (WATTS CAZZANIGA S P A) 16 August 2001 (2001-08-16) the whole document	2,3,5-7, 12,14-17 11 1
X	DE 298 06 215 U (DUMSER METALLBAU GMBH & CO KG) 29 July 1999 (1999-07-29) claims 1-4,11,13; figures 1,2	2-6,12, 14-17
Y	DE 196 08 780 A (SBK GMBH) 12 September 1996 (1996-09-12) the whole document	11
A	DE 44 02 752 A (DANFOSS AS) 3 August 1995 (1995-08-03) column 1, line 42-68; figure 3	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

**\* Special categories of cited documents:**

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

16 December 2002

Date of mailing of the international search report

31/01/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentplan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 851 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Leclaire, T

## INTERNATIONAL SEARCH REPORT

PCT/IB 02/01382

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
DE 10038874	A	16-08-2001	IT	MI20000131 A1	31-07-2001
			DE	10038874 A1	16-08-2001
			EP	1130364 A1	05-09-2001
			US	6325098 B1	04-12-2001
DE 29806215	U	29-07-1999	DE	29806215 U1	29-07-1999
DE 19608780	A	12-09-1996	DE	19608780 A1	12-09-1996
			DE	29623644 U1	25-02-1999
			AT	406793 B	25-09-2000
			AT	45996 A	15-01-2000
			CH	692591 A5	15-08-2002
			FR	2731492 A1	13-09-1996
DE 4402752	A	03-08-1995	DE	4402752 A1	03-08-1995
			AT	193757 T	15-06-2000
			AU	1532895 A	15-08-1995
			CA	2180562 A1	03-08-1995
			CN	1139979 A , B	08-01-1997
			CZ	9602205 A3	12-02-1997
			DE	69517414 D1	13-07-2000
			DE	69517414 T2	11-01-2001
			WO	9520733 A1	03-08-1995
			EP	0742876 A1	20-11-1996
			FI	963013 A	30-07-1996
			LV	11565 A	20-10-1996
			NO	963110 A	25-07-1996
			PL	315531 A1	12-11-1996
			RU	2126510 C1	20-02-1999
			SI	9520018 A	31-12-1996
			SK	99896 A3	08-01-1997